

INDUSTRIAL STEEL CLADDING









Not recommended
JUNIOR H-F™



CORRUGATED 7/8"



UTILITY PANEL

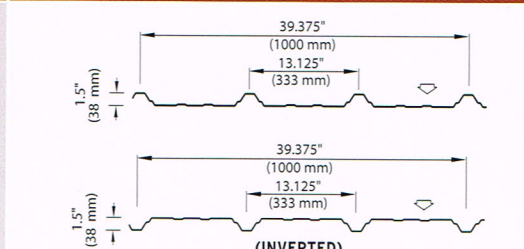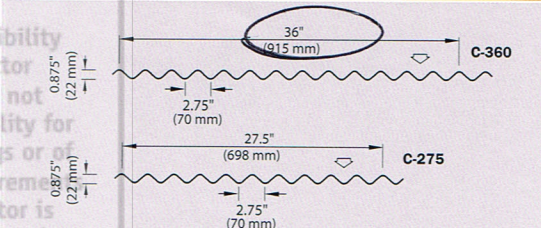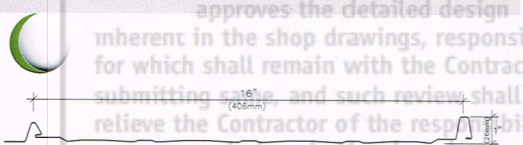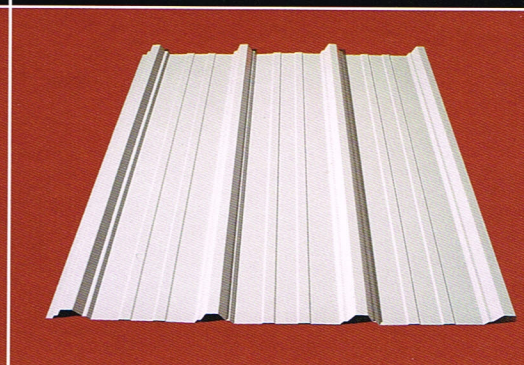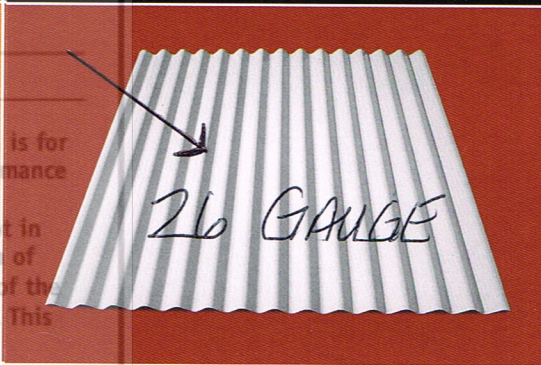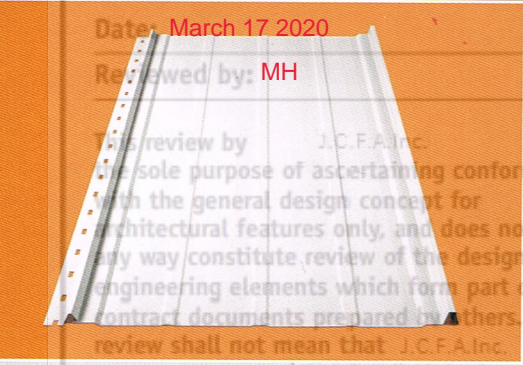

Our most economically priced **Junior H-F™** steel roofing panel from the same family as our prestigious **Heritage Series™**. Borrowing from the traditional style and appearance of standing seam roofs, this hidden fastener roofing panel needs no clips or seamer to install. It comes pre-punched for screws and nylon washers allowing for the natural expansion and contraction of the steel in 16" (406 mm) widths. Each panel is coated with a high quality **Perspectra PLUS Series™/WeatherXL™** paint offering 40 years of film integrity. It is available in several trendy colours reflecting the sun's ultraviolet and infrared rays to reduce the heat island effect in compliance with LEED® credit requirements. The **Junior H-F™** can be curved on site over a convex solid backing roof with a minimum radius of 16 feet.

Installed vertically or horizontally, our **Corrugated 7/8"** panel has resurfaced on new architectural and industrial buildings in the past few years. This panel is available in widths of 36" and 27½" and cut up to 40 feet in length to offer more versatility, more colour and material possibilities.

Ideal Roofing's **Utility** panel is one of the most versatile industrial panels, as it can be used both as roofing or siding on steel or wood structures for commercial and industrial buildings. For roofing applications, the **Utility** panel provides maximum economy, with a load capacity allowing it to be installed over purlins at 48" centre in most areas of Eastern Canada. For siding installations only, this panel can be reversed and is referred to as the **Inverted Utility** panel.

* Stiffener ribs can be removed upon request.

Product Specifications

- Mill finish Galvalume Plus Steel
ASTM-A792 SS Grade 33, AZ165
Gauge (thickness): 29 (.0165")
- Pre-painted Galvalume Steel
ASTM-A792 SS Grade 33, AZ150
Perspectra **PLUS Series™/WeatherXL™**:
See colour chart.
Gauge (thickness): 29 (.0165")

Product Specifications

- Mill finish Galvanized Steel
ASTM-A653 SS Grade 33, Z275 (G-90)
Gauges (thicknesses): 30 (.015"), 28 (.018"), 26 (.021"), 24 (.026"), 22 (.032"), 20 (.038"), 18 (.049")
- Mill finish Galvalume Plus Steel
ASTM-A792 SS Grade 33, AZ165, AZ180
Gauges (thicknesses): 30 (.015"), 28 (.018"), 26 (.021"), 24 (.026"), 22 (.032")
- Pre-painted Galvanized Steel
ASTM-A653 SS Grade 33, Z275 (G-90)
Perspectra **PLUS Series™/WeatherXL™**: See colour chart.
Gauges (thicknesses): 30 (.015"), 28 (.018"), 26 (.021"), 24 (.026"), 22 (.032")

Product Specifications

- Mill finish Galvanized Steel
ASTM-A653 SS Grade 33, Z275 (G-90)
Gauges (thicknesses): 26 (.021"), 24 (.026"), 22 (.032")
- Mill finish Galvalume Plus Steel
ASTM-A792 SS Grade 33, AZ180
Gauges (thicknesses): 26 (.021"), 24 (.026"), 22 (.032")
- Pre-painted Galvanized Steel
ASTM-A653 SS Grade 33, Z275 (G-90)
Perspectra **PLUS Series™/WeatherXL™**: See colour chart.
Gauges (thicknesses): 26 (.021"), 24 (.026"), 22 (.032")