

Mr. Ryan Firlotte

Re: **Entreprise Rent A Car 225 Huntmar Ottawa.**

Date: June 18, 2020 Page: 2

PER.....

Jason C. Flynn, OAA, MRAIC

Flynn Architect Inc.


Email: j.flynn@flynnarchitect.com

DISTRIBUTION: as above



WSTM LED

LED Mini Wall Sconce

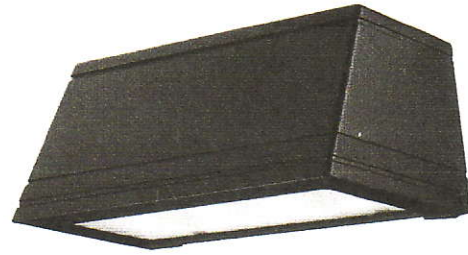

Use
The architectural shape of the WSTM LED was designed for applications such as hospitals, schools, malls, restaurants, commercial buildings. The long-life LEDs make the fixture nearly maintenance-free.

- Diffuse lens reduces glare and provides comfortable illumination
- Simple mounting configuration only requires a universal junction box to surface mount

Energy Savings
Designed to replace up to a 100W MH luminaire while saving up to 87% in energy

Listings
CSA Certified to U.S. standards. Luminaire is IP65 rated and suitable for wet locations when mounted with the lens down. Rated for -30°C minimum ambient. DesignLights Consortium® qualified product.

Deliver an expected service life of more than 100,000 hours and eliminate the frequent lamp changes associated with traditional sources



ORDERING INFORMATION

Specifications subject to change.

Example: WSTM LED 2A 40K 120 DDBTXD

Series	LEDs	Color temperature	Voltage	Mounting	Control options
WSTM LED	1A One engine	30K 3000K	120	<u>Shipped included</u>	<u>Shipped installed</u>
	2A Two engines	40K 4000K		(blank) Surface mount <u>Shipped separately</u> ¹ UT5 Uptilt 5 degrees bracket	PE Photoelectric cell-button type

Other options	Finish	Accessories: Order Separately
<u>Shipped installed</u>	DDBXD Dark bronze	WSTMUT5 DDBXD U 5 degree uptilt accessory (specify finish)
(blank) Diffusing glass lens	DBLXD Black	WSTMWG U Wire guard accessory
GL Clear glass lens	DNAXD Natural aluminum	
<u>Shipped separately</u> ¹	DWHXD White	
WG Wire guard	DDBTXD Textured dark bronze	
	DBLBXD Textured black	
	DNATXD Textured natural aluminum	
	DWHGXD Textured white	
	DSSTXD Textured sandstone	

ADDITIONAL INFORMATION

For additional product information, visit www.lithonia.com.

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

SPECIFICATIONS			
HEIGHT	WIDTH	DEPTH	WEIGHT
5-3/4" (14.6 cm)	12-1/2" (31.8 cm)	7-1/2" (19.1 cm)	6 lbs (2.7 kg)



Notes

¹ Also available as a separate accessory; see Accessories.