


## GENERAL NOTE(S):

1- DRY SPRINKLER SYSTEM IN ATTIC SPACE IS MOSTLY COMPLETED. SECTIONS OF PIPING ARE MISSING AND WILL NEED TO BE COMPLETED. VERIFY ALL SPRINKLER HEADS TO SEE IF ANY HAVE BEEN DAMAGED. PROVIDE FOR THE REPLACEMENT OF 10 SPRINKLER HEADS OR IF MISSING. SEE NEW LAYOUT.

2- ALL VICTAULIC JOINTS TO BE VISUALLY INSPECTED BEFORE PRESSURE TEST IS DONE, TO SEE IF ALL JOINTS HAVE BEEN PROPERLY INSTALLED AND SYSTEM IS READY FOR PRESSURE TEST.

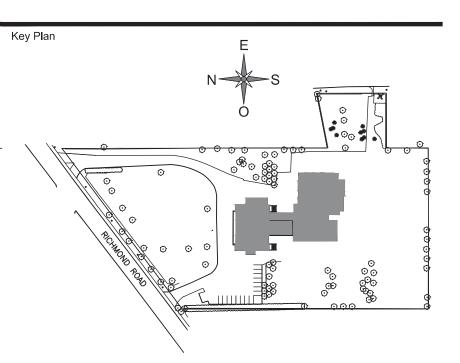

REVIEW  N° Date	Description
0 2018-06-01	FOR TENDER
	000





THIS DRAWING IS ISSUED FOR DEMOLITION

PURPOSES, IT REPRESENTS AN INVENTORY OF THE MAIN EXISTING INSTALLATIONS, GENERALLY VERIFIED IN CONNECTION WITH

THE MODIFICATIONS SHOWN ON THIS

WHICH THE GENUINE CONDITIONS MUST BE OBSERVED ON THE SITE BY THE

CONTRACTOR.

DRAWING'S "MODIFIED" VERSION, AND OF

MAISON DE DE LA FRANCOPHONIE D'OTTAWA

2720 RICHMOND ROAD, OTTAWA

MECHANICAL FIRE PROTECTION ATTIC DEMOLITION

Project n°: 7342-001-000 2018-06-01 Scale: 1/8" = 1'-0"

Drawing n⁰

MD-100

