

April 29, 2019

ST. LAWRENCE COLLEGE CAFETERIA RENOVATION

ADDENDUM NO. 3

April 29, 2019

This Addendum forms part of the Contract Documents and amends the original drawings and specifications. Tenderers are reminded to acknowledge on the Form of Tender that this Addendum has been received.

DRAWINGS AND SPECIFICATIONS

Mechanical


Item No. 1	Section
3.1.1	SKM0-1: Added specification section for kitchen hood.
3.1.2	SKM0-1: Added specification section for kitchen exhaust fan.
3.1.3	SKM1-1: Revised fan schedule to indicate EF-9 is part of contract (not pre-purchased).
3.1.4	SKM1-1: Revised Pita Pit Equipment Schedule to indicate exhaust system is part of contract (not pre-purchased).
3.1.5	SKM3-1: Extended drain and vent line to suit location of salad bar. Added note to provide new continuous flow automatic trap seal primer from closest DCW pipe.
3.1.6	SKM3-2: Edited notes to increase size of natural gas pipe from ¾" to 1" up to reduction at gas griddle connection.
3.1.7	SKM4-1: Added wording to provide horizontal grease duct as required to avoid steel beam above. Revised plan view of duct to indicate horizontal portion of duct.
3.1.8	SKM4-1: Added wording to indicate kitchen hood is part of contract (not pre-purchased).
3.1.9	SKM4-2: Revised detail 4/M4 to indicate the kitchen hood and EF-9 are part of the contract (not pre-purchased) and to indicate the grease duct must be installed to avoid the existing steel beam on the ceiling and the partial wall.
3.1.10	M5: Drawing M5 has been replaced in its entirety to illustrate the new natural gas tie point and the revised location of EF-9 to avoid the steel beam. Note the natural gas pipe size has been increased from ¾" to 1".

END OF ADDENDUM NO. 3

April 29, 2019

Prepared by:

J.L. RICHARDS & ASSOCIATES LIMITED

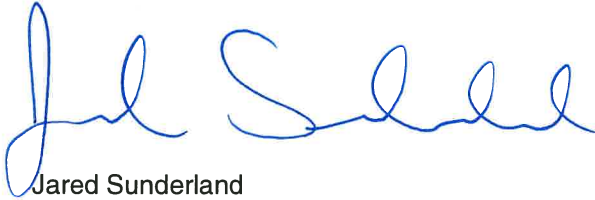

Jared Sunderland
Architect

JS:mk

Addendum 3

April 29, 2019