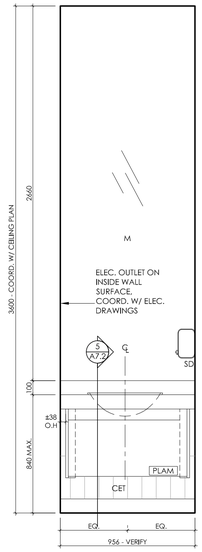

1 A7.2 MEN'S WSHRM VANITY - ELEV.

0 200 500 1000mm

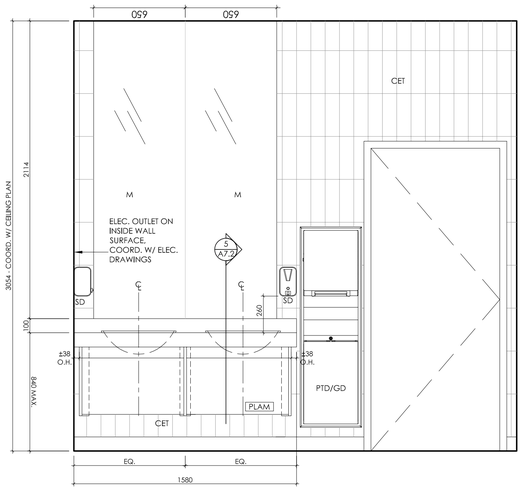

2 A7.2 TYPICAL WASHROOM VANITY - ELEV.

0 200 500 1000mm

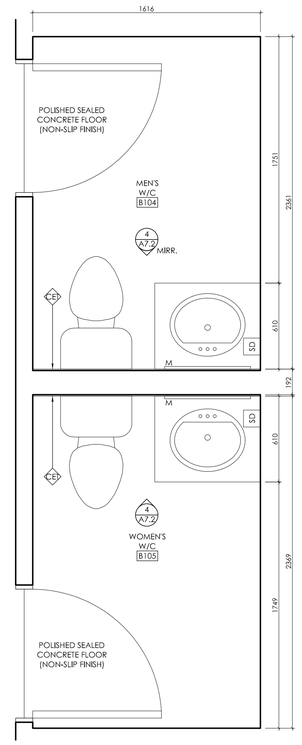

3 A2.1 WASHROOM PLANS

0 200 500 1000mm

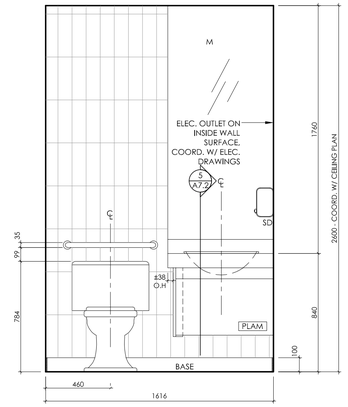

4 A7.2 WSHRM B105 VANITY - ELEV.

0 200 500 1000mm

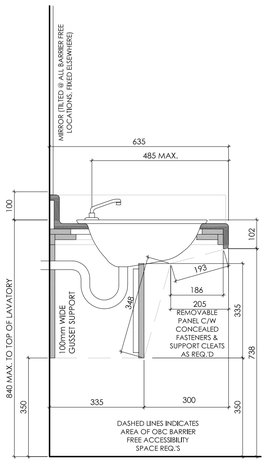

5 A7.2 BF. WR. VANITY LAVATORY

0 10 20 50mm

WASHROOM LEGEND

CH	COAT HOOK
DF	DRINKING FOUNTAIN
EPB	EMERGENCY PUSH BUTTON
GD	GARBAGE DISPOSAL
HD	HAND DRYER
HGB	HORIZONTAL GRAB BAR
H/VGB	HORIZONTAL/VERTICAL GRAB BAR
M	MIRROR
O.H	OVERHANG
PLAM	PLASTIC LAMINATE
PTD	PAPER TOWEL DISPENSER
PTL	PUSH TO LOCK
SD	SOAP DISPENSER
SHF	SHELF
SND	SANITARY NAPKIN DISPENSER
TB	TOWEL BAR
TPD	TOILET PAPER DISPENSER
VGB	VERTICAL GRAB BAR

WASHROOM LEGEND

BF — POWER DOOR OPENER

PUSH BUTTON FOR POWER DOOR OPERATOR - 610mm MIN. FROM THE END OF ANY DOOR SWING (925mm A/F/F TO CENTER OF BUTTON TYP.)

EPB — EMERGENCY PUSH BUTTON / CALL SYSTEM W/ AUDIBLE / VISUAL SIGNALING ON INSIDE & OUTSIDE & EMERGENCY SIGN (925mm A/F/F TO CENTER OF BUTTON TYP.) (400mm A/F/F UNIV. WR. TYP.) (U/S DESK FOR SELECTIVE MILLWORK)

X — ALL WALLS — WALL FINISH FULL HEIGHT (TO 200mm ABOVE FIN. CEILING OR TO U/S DECK) ON ALL WASHROOM WALLS TYP. (COORD. W/ INT. WASHROOM ELEV.'S FOR ANY ASSOCIATED PATTERNS)

X — ACCENT — WALL FINISH ACCENT (COORD. W/ INT. WASHROOM ELEV.'S FOR ANY ASSOCIATED PATTERNS)

X — NOTE — WALL FINISH NOTE FOR ANY ADDITIONAL RELEVANT INFO.

X — EXTENTS FOR ALL WALLS — WALL FINISH TERMINATION POINT

GENERAL NOTES

- CONTRACTOR SHALL VERIFY ALL ROUGH-IN & PLUMBING ROUGH-IN, FIXTURE & ACCESSORY MOUNTING HEIGHTS & OTHER SIMILAR NON-TYPICAL SPACES W/ OWNER / OPERATOR PRIOR TO CONST. THE ABOVE NOTED HEIGHTS SHALL BE CONFIRMED TO BE IN ACCORDANCE W/ THE LATEST O.B.C. PRIOR TO ROUGH-IN & INSTALLATION

  WASHRM'S & DRINKING FTN.'S TILE WALL FIN. TO HAVE TILE BASE. TILE WALL FIN. TO EXTEND TO U/S FIN. CIELING TYP. (COORD. W/ TYP. TILE PATTERN ELEV.'S & A7 STD. DRINKING FTN. DETAILS)

- WASHRM'S & DRINKING FTN.'S W/O WALL FIN. TO HAVE SPECIAL PERFORMANCE COATING (EPOXY PAINT) APPLIED W/ RUBBER BASE

- COORD. W/ INTERIOR FIN. SCH. FOR TILE MANUF. / COLOURS TYP.

- SHOP DWG.'S TO BE IN DIMENSION UNITS AS ILLUSTRATED ON THIS DWG. OR THEY WILL BE REJECTED (IMPERIAL & METRIC BOTH SHOWN IS ACCEPTABLE)

HATCH IDENTIFICATION MARKER LEGEND

CERAMIC TILE (COORD. W/ TYP. TILE PATTERN ELEV. FOR TYPE)

CERAMIC TILE (FLOORS) (COORD. W/ TYP. TILE PATTERN ELEV. FOR TYPE)

MILLWORK NOTES:

COUNTERTOPS:

- POSTFORMED PLAM ON 19mm PLYWD. SUBSTRATE. CAULK ALL PER.'S OF COUNTER WHERE THERE IS NO BACK SPLASH
- SOLID SURFACE ON 19mm PLYWD. SUBSTRATE C/W SOLID SURFACE / INTEGRAL FRONT APRON & BACKSPLASH. CAULK ALL PER.'S OF COUNTER WHERE THERE IS NO BACK SPLASH
- NON-DRIP EDGE AT SINK LOCATIONS. PROVIDE END/SIDE SPLASH AT ALL END LOCATIONS & BACKSPLASH AS REQUIRED WHERE PERMITS AT COUNTERTOPS THAT CONTAIN SINKS & WHERE SHOWN ON ELEV.'S

CASEWORK:
(PLAM W/ 3mm PVC EDGE WHERE EXP.'D)

- 19mm PLYWD. BACK, BOTTOM, GABLES (INTERMEDIATE & END), TOP(S), SHELVING, DOORS, DRAWER FRONTS, FACEPLATES, KICK PLATES, REMOVABLE PANELS, GUSSET SUPPORTS, SUPPORT CLEATS, BLOCKING, FIXED PANELS, LIGHT VALANCES & ALL OTHER PIECES NOT NOTED WITHIN THIS LEGEND

GENERAL:

- PROVIDE ALL CUT-OUTS & ACCESS PANELS IN MILLWORK AS REQ.'D FOR ELEC. & MECH. ACCESS / CONNECTIONS.
- PROVIDE ALL SUPPORT BLOCKING FOR COUNTERTOPS & MILLWORK AS REQ.'D
- COORD. W/ REFLECTED CEILING PLANS FOR BULKHEAD LOCATIONS & DEPTH
- COORD. W/ SPEC.'S FOR HARDWARE
- ALL STEEL SUPPORTING MEMBERS TO BE PTD. TYP.
- FULL EXTENSION DRAWER SLIDES TYP.

REVISIONS

NO.	DATE	PARTICULAR
1	2017.08.22	ISSUED FOR CLIENT REVIEW
2	2017.10.12	ISSUED FOR TENDER

NOTES:

PRELIMINARY
NOT TO BE USED FOR CONSTRUCTION

All dimensions and measurements must be checked and verified by the General Contractor

Reproduction of drawings and related documents in whole or in part is forbidden without written permission of The Ventin Group.

CLIENT:
TOWNSHIP OF McNAB / BRAESIDE

PROJECT:
21688

McNAB / BRAESIDE MUNICIPAL BUILDING

2473 RUSSETT DRIVE, ARNPRIOR, ONTARIO K7S 3G8

ORIGINAL PAGE SIZE ARCH D - 24" x 36"

KEY TO DETAIL LOCATION:
A - DETAIL NO.
B - DETAIL NO. ORIGIN

+VG ARCHITECTS
THE VENTIN GROUP LTD

CN N

WASHROOM PLANS, ELEVATIONS & DETAILS

A7.2

DRAWN BY : KH, NM CHECKED BY : YR

Plot Date: Oct 12, 2017 - 1:59pm By: User Filename: C:\Users\User\AppData\Local\Temp\Temp1_M&B Town Hall - A7.1 - Standard.zip\M&B Town Hall - A7.1.dwg