

✓ Reviewed by FB(TBIL)-June 13/19
✓ Revised Dimensions on July 03/19.



QUOTE BY: Jeff Gorin

QUOTE #: JJDG01126

SOLD TO: Tal-co Building Innovations LTD
Pat Newton

SHIP TO:

Phone: 613-821-3959

PROJECT NAME: 1 & 3 Meridian place with BM

PO#:

REFERENCE: REVISED JUNE 12TH

Ship Via: Ground/Next Truck

SUPPLY ONLY

WINDOWS ONLY

INCLUDED:

SHOP DRAWING REVIEW

REVIEWED
REVIEWED AS NOTED
REVISE AND RESUBMIT



SERIES- JELD-WEN SITELINE ALUMINUM CLAD WOOD
EXTERIOR COLOUR- BRILLANT WHITE
INTERIOR COLOUR- PRIMED WHITE - AURALAST PINE
INTERIOR JAMB MATERIAL- FJ PINE FOR 2X6 WALL CONSTRUCTIONS
WINDOW LOCKS- MULTI-POINT
WINDOW HANDLES- ENCORE FOLDING/NESTING
1-1/2" BRICKMOULD

"This review is for the sole purpose of ascertaining conformance with the general design concept for architectural features only, and does not in any way constitute review of the design of engineering elements which form part of the Contract Documents prepared by others. This review shall not mean that the Architect approves the detail design inherent in the shop drawings. This responsibility shall remain with the Contractor submitting same, and such review shall not relieve the Contractor of his responsibility for errors or omissions in the shop drawings or of his responsibility for meeting all requirements of the Contract Documents. The Contractor is responsible for dimensions to be confirmed and correlated at the job site, for information that pertains solely to fabrication processes, or to techniques of construction and installation and for co-ordination for the work of all trades."

NOT INCLUDED:

By: Bryan Bonell Date: June 28, 2019
HOBIN ARCHITECTURE INCORPORATED

POUR IN PLACE BASEMENT WINDWS
ANY OTHER OPTION OR FEATURE NOT MENTIONED OR REFERRED TO DIRECTLY IN THIS QUOTE

ADDITIONAL NOTES:

AuraLast is JELD-WEN's proprietary water-based wood protection process. Unlike traditional chemical dip-treatments that only coat a thin layer on the wood's surface, AuraLast delivers virtually 100 percent surface-to-core protection. JELD-WEN wood windows, patio doors and door frames with AuraLast Wood can protect you from the expense, damage and inconvenience of decaying wood.

1. PLEASE PROVIDE EXTERIOR COLOUR SAMPLE.
2. LIMITERS TO BE PROVIDED ON WINDOWS ON WEST ELEVATION AND ON W41 ON SOUTH ELEV.
3. ORIGINAL FIXED WINDOWS WERE NOT DONE AS FIXED CASEMENTS - SEE ATTACHED PHOTO. CAN THIS NOT BE DONE HERE?
4. SIZES TO BE CONFIRMED WITH GENERAL CONTRACTOR.

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-1 W37
Rough Opening: 22 3/4 X 70 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
Frame Size : ~~22 X 70~~ $\rightarrow 21\frac{1}{2} \times 70\frac{3}{16}$ "
(Outside Casing Size: ~~25 X 71 13/16~~), $24\frac{1}{2} \times 72$ "
Siteline Clad Casement, Auralast Pine, Single w/Transom
Brilliant White Exterior,
Primed Interior,
Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
DripCap, Brilliant White Trim,
4 9/16 Jamb, 4/4 Thick, ✓
Stationary,
Canada-NAFS 08 & 11/CSA A440, DP 35,
Insulated Low-E 180 Annealed Glass, Neat, Protective Film, Silver
Spacer, Argon Filled, Traditional Glz Bd,
This mull configuration complies with AAMA 450 standards and is
professional engineer-approved.
PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

~~12~~ 10

Line-1-1 (A1)

Frame Size : 22 X 16
Siteline Clad Casement, Auralast Pine, DIRECT SET RECTANGLE?
Brilliant White Exterior,
Primed Interior,
Nail Fin (Standard),
3 3/16 Jamb,
Stationary,
Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
Resistance 500 Air Level Fixed
Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
Silver Spacer, Argon Filled, Traditional Glz Bd,
Custom-Width, *Custom-Height*, GlassThick=0.698,
U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-1-2 (B1)

Frame Size : 22 X 54
Siteline Clad Casement, Auralast Pine, DIRECT SET RECTANGLE?
Brilliant White Exterior,
Primed Interior,
Nail Fin (Standard),
3 3/16 Jamb,
Stationary,
Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
Resistance 500 Air Level Fixed
Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
Silver Spacer, Argon Filled, Traditional Glz Bd,
Custom-Width, GlassThick=0.698,
U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-2 W37B
Rough Opening: 22 3/4 X 70 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item **19 1/2" x 70 3/16"**
 Frame Size : ~~22 X 70~~, BTM= 54
 (Outside Casing Size: ~~25 X 71 13/16~~, **22 1/2" x 72"**)
 Sitrine Clad Casement, Auralast Pine, Single w/Transom
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 4 9/16 Jamb, 4/4 Thick, ✓
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, DP 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film, Silver
 Spacer, Argon Filled, Traditional Glz Bd,
 This mull configuration complies with AAMA 450 standards and is
 professional engineer-approved.
 FEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

24

Line-2-1 (A1)


Frame Size : 22 X 16
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 500 Air Level Fixed
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, *Custom-Height*, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-2-2 (B1)

Frame Size : 22 X 54
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 500 Air Level Fixed
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-3 W38
Rough Opening: 75 1/4 X 70 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size (74 1/2 X 70 ~~3/4~~ ")
 (Outside Casing Size: (77 1/2 X 71-13/16), 72")
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 2 Wide,
 2 High,
 Factory Structural Mull,
 4 9/16 Jamb, 4/4 Thick, ✓
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 Mull Window Assembly Has Not Been Tested To AAMA 450.
 Vertical Structural Mull 1 Vertical Spread, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

3 ✓

Line-3-1 (A1)

Frame Size : 20 X 16
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-3-2 (A2)

Frame Size : 54 1/4 X 16
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-3-3 (B1)


SCC2054
 Frame Size : 20 X 54
 Sitrine Clad Casement, Auralast Pine,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Hinge Left,
 Nesting Crank Handle, White Hardware, HDWE-APPLIED,
 Stainless Steel Operator/Hinge,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 BetterVue Mesh Brilliant White Screen, Screen Applied
 GlassThick=0.698,
 Clear Opening:10.1w (258mm), 49.5h (1259.5mm), 3.4 sf
 (0.32sq.m)

 U-Factor: 1.65, SHGC: 0.47, VLT: 0.54, Energy Rating: 31.00,
 CPD: JEL-N-877-00014-00001, Canadian Energy Star: 12

Line-3-4 (B2)

Frame Size : 54 1/4 X 54
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.756,
 U-Factor: 1.59, SHGC: 0.58, VLT: 0.67, Energy Rating: 38.00,
 CPD: JEL-N-889-01514-00001, Canadian Energy Star: 123

Line-4 W38R
 Rough Opening: 75 1/4 X 70 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size (74 1/2 X 70 - 3/16")
 (Outside Casing Size: 77 1/2 X 71 13/16 72")
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 2 Wide
 2 High,
 Factory Structural Mull,
 4 9/16 Jamb, 4/4 Thick ✓
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 Mull Window Assembly Has Not Been Tested To AAMA 450.
 Vertical Structural Mull 1 Vertical Spread, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

3 ✓

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-4-1 (A1)

Frame Size : 54 1/4 X 16
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-4-2 (A2)

Frame Size : 20 X 16
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-4-4 (B1)

Frame Size : 54 1/4 X 54
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.756,
 U-Factor: 1.59, SHGC: 0.58, VLT: 0.67, Energy Rating: 38.00,
 CPD: JEL-N-889-01514-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-4-3 (B2)

SCC2054

Frame Size : 20 X 54

Siteline Clad Casement, Auralast Pine,

Brilliant White Exterior,

Primed Interior,

Nail Fin (Standard),

3 3/16 Jamb,

Hinge Right,

Nesting Crank Handle, White Hardware, HDWE-APPLIED,

Stainless Steel Operator/Hinge,

PG 35,

Insulated Low-E 180 Annealed Glass, Neat, Protective Film,

Silver Spacer, Argon Filled, Traditional Glz Bd,

BetterVue Mesh Brilliant White Screen, Screen Applied

GlassThick=0.698,

Clear Opening:10.1w (258mm), 49.5h (1259.5mm), 3.4 sf
(0.32sq.m)


U-Factor: 1.65, SHGC: 0.47, VLT: 0.54, Energy Rating: 31.00,

CPD: JEL-N-877-00014-00001, Canadian Energy Star: 12

Line-5

W39

Rough Opening: 55 3/4 X 70 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item

Frame Size : 55 X 70 ^{3"}_{-16"}

(Outside Casing Size: ~~58 X 71 13/16~~ ^{72"})

Siteline Clad Mull Auralast Pine, Casement/Awning Product,

Brilliant White Exterior,

Primed Interior,

Aluminum Brickmould, Standard Sill Nosing, Color Match Metal

DripCap, Brilliant White Trim,

2 Wide

2 High,

Factory Structural Mull,

4 9/16 Jamb, 4/4 Thick, ✓

Canada-NAFS 08 & 11/CSA A440, DP 35,

Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,

Argon Filled, Traditional Glz Bd,

This mull configuration complies with AAMA 450 standards and is

professional engineer-approved.

Vertical Structural Mull 1 Vertical Spread, 1/4" Wide,

PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

2 ✓

Line-5-1 (A1)

Frame Size : 20 X 16

Siteline Clad Geometric, Auralast Pine, Direct Set Rectangle,

Brilliant White Exterior,

Primed Interior,

Nail Fin (Standard),

3 3/16 Jamb,

Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration

Resistance 400 Air Level A3

Insulated Low-E 180 Annealed Glass, Neat, Protective Film,

Silver Spacer, Argon Filled,

GlassThick=0.7095,

U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,

CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-5-2 (A2)

Frame Size : 34 3/4 X 16
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 400 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-5-3 (B1)


SCC2054
 Frame Size : 20 X 54
 Sitrine Clad Casement, Auralast Pine,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Hinge Left,
 Nesting Crank Handle, White Hardware, HDWE-APPLIED,
 Stainless Steel Operator/Hinge,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 700 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 BetterVue Mesh Brilliant White Screen, Screen Applied
 GlassThick=0.698,
 Clear Opening:10.1w (258mm), 49.5h (1259.5mm), 3.4 sf
 (0.32sq.m)
 U-Factor: 1.65, SHGC: 0.47, VLT: 0.54, Energy Rating: 31.00,
 CPD: JEL-N-877-00014-00001, Canadian Energy Star: 12

Line-5-4 (B2)

Frame Size : 34 3/4 X 54
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 400 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-6 W39R
Rough Opening: 55 3/4 X 70 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size : 55 X 70 - ^{3"}/₁₆"
 (Outside Casing Size: 58 X 71 ^{13/16}/₁₆" 72")
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 2 Wide
 2 High,
 Factory Structural Mull,
 4 9/16 Jamb, 4/4 Thick, ✓
 Canada-NAFS 08 & 11/CSA A440, DP 35,
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 This mull configuration complies with AAMA 450 standards and is
 professional engineer-approved.
 Vertical Structural Mull 1 Vertical Spread, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

2 ✓

Line-6-1 (A1)

Frame Size : 34 3/4 X 16
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 400 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-6-2 (A2)

Frame Size : 20 X 16
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 400 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-6-4 (B1)


Frame Size : 34 3/4 X 54
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 400 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-6-3 (B2)

SCC2054
 Frame Size : 20 X 54
 Sitrine Clad Casement, Auralast Pine,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Hinge Right,
 Nesting Crank Handle, White Hardware, HDWE-APPLIED,
 Stainless Steel Operator/Hinge,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 700 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 BetterVue Mesh Brilliant White Screen, Screen Applied
 GlassThick=0.698,
 Clear Opening:10.1w (258mm), 49.5h (1259.5mm), 3.4 sf
 (0.32sq.m)
 U-Factor: 1.65, SHGC: 0.47, VLT: 0.54, Energy Rating: 31.00,
 CPD: JEL-N-877-00014-00001, Canadian Energy Star: 12

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-7 W40
Rough Opening: 46 3/4 X 63 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size : ~~46 X 63~~, BTM= 40 (44-1/4" x 61 3/16")
 (Outside Casing Size: ~~49 X 64 13/16~~), (47 1/4" x 63")
 Sitrine Clad Casement, Auralast Pine, Two Wide w/Two Transoms
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 Factory Structural Mull,
 6 9/16 Jamb, 4/4 Thick, ,
 Left/Right,
 Stainless Steel Operator/Hinge,
 Nesting Crank Handle, White Hardware,
 Canada-NAFS 08 & 11/CSA A440, DP 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film, Silver
 Spacer, Argon Filled, Traditional Glz Bd,
 BetterVue Mesh Brilliant White Screen,
 This mull configuration complies with AAMA 450 standards and is
 professional engineer-approved.
 Vertical Structural Mull 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

3 ✓

Line-7-1 (A1)

Frame Size : 22 7/8 X 23
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 500 Air Level Fixed
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, *Custom-Height*, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-7-2 (A2)

Frame Size : 22 7/8 X 23
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 500 Air Level Fixed
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, *Custom-Height*, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-7-3 (B1)

Frame Size : 22 7/8 X 40
 Siteline Clad Casement, Auralast Pine,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Hinge Left,
 Nesting Crank Handle, White Hardware, HDWE-APPLIED,
 Stainless Steel Operator/Hinge,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 700 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 BetterVue Mesh Brilliant White Screen, Screen Applied
 Custom-Width, *Custom-Height*, GlassThick=0.698,
 Clear Opening:13w (331mm), 35.5h (903.9mm), 3.2 sf
 (0.29sq.m)

U-Factor: 1.65, SHGC: 0.47, VLT: 0.54, Energy Rating: 31.00,
 CPD: JEL-N-877-00014-00001, Canadian Energy Star: 12

Line-7-4 (B2)

Frame Size : 22 7/8 X 40
 Siteline Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
~~Hinge Right,~~ **FIXED**
~~Nesting Crank Handle, White Hardware, HDWE-APPLIED,~~
~~Stainless Steel Operator/Hinge,~~
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 700 Air Level A3
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 BetterVue Mesh Brilliant White Screen, Screen Applied
 Custom-Width, *Custom-Height*, GlassThick=0.698,
 Clear Opening:13w (331mm), 35.5h (903.9mm), 3.2 sf
 (0.29sq.m)

U-Factor: 1.65, SHGC: 0.47, VLT: 0.54, Energy Rating: 31.00,
 CPD: JEL-N-877-00014-00001, Canadian Energy Star: 12

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-8 W41
Rough Opening: 16 3/4 X 62 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size : ~~16 X 62~~, BTM= 48 (15 7/8" x 61 3/16")
 (Outside Casing Size: 19 X 63 13/16), (18-7/8" x 63")
 Sitrine Clad Casement, Auralast Pine, Single w/Transom
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 6 9/16 Jamb, 4/4 Thick, ,
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, DP 35,
 Insulated Low-E 180 Obscure Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 This mull configuration complies with AAMA 450 standards and is
 professional engineer-approved.
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

2 ✓

Line-8-1 (A1)


Frame Size : 16 X 14
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 500 Air Level Fixed
 Insulated Low-E 180 Obscure Annealed Glass, Neat, Protective
 Film, Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, *Custom-Height*, GlassThick=0.726,
 U-Factor: 1.59, SHGC: 0.54, VLT: 0.62, Energy Rating: 36.00,
 CPD: JEL-N-878-01699-00001, Canadian Energy Star: 123

Line-8-2 (B1)

Frame Size : 16 X 48
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 Canada-NAFS 08 & 11/CSA A440, PG 35, Water Penetration
 Resistance 500 Air Level Fixed
 Insulated Low-E 180 Obscure Annealed Glass, Neat, Protective
 Film, Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, GlassThick=0.726,
 U-Factor: 1.59, SHGC: 0.54, VLT: 0.62, Energy Rating: 36.00,
 CPD: JEL-N-878-01699-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-9 W42
Rough Opening: 79 1/4 X 79 1/4



Viewed from Exterior. Scale: 1/4" = 1'

SEE ATTACHED PHOTO
FOR TRIMS

Main Line Item
 Frame Size : ~~78 1/2 X 78 1/2~~ (75 3/4" x 76 15/16")
 (Outside Casing Size: 81 1/2 X 80 5/16), (78 3/4" x 78 3/4")
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 3 Wide
 3 High,
 Factory Structural Mull,
 6 9/16 Jamb, 4/4 Thick, ,
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 Mull'd Window Assembly Has Not Been Tested To AAMA 450.
 Vertical Structural Mull 2 Vertical Spreads, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

COMMENTS:

DOES NOT INCLUDE METAL FEATURE TRIM - DRAWING REQUIRED

1 ✓

Line-9-1 (A1)

Frame Size : 13 X 14
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-9-2 (A2)

Frame Size : 52 X 14
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-9-5 (A3)

Frame Size : 13 X 14
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-9-3 (B1)

Frame Size : 13 X 50 1/2
GEOMETRIC Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, *Custom-Height*, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-9-4 (B2)

Frame Size : 52 X 50 1/2
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.756,
 U-Factor: 1.59, SHGC: 0.58, VLT: 0.67, Energy Rating: 38.00,
 CPD: JEL-N-889-01514-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-9-6 (B3)

Frame Size : 13 X 50 1/2
GEOMETRIC Sitrine Clad ~~Case~~ment, Auralast Pine, **DIRECT SET RECTANGLE**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Width, *Custom-Height*, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-9-7 (C1)

Frame Size : 13 X 14
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-9-8 (C2)


Frame Size : 52 X 14
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-9-9 (C3)

Frame Size : 13 X 14
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-10 W43
 Rough Opening: 75 X 85 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size : ~~74 1/4 X 85~~ (74 1/4 x 83 1/4)
 (Outside Casing Size: ~~77 1/4 X 86 13/16~~), (77 1/4 x 85 1/16)
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 2 Wide
 2 High,
 Factory Structural Mull,
 6 9/16 Jamb, 4/4 Thick, ,
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 Mull Window Assembly Has Not Been Tested To AAMA 450.
 Vertical Structural Mull 1 Vertical Spread, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

1 ✓

Line-10-1 (A1)

Frame Size : 20 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-10-2 (A2)

Frame Size : 54 X 20
 Siteline Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-10-3 (B1)


Frame Size : 20 X 65
 Siteline Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Height, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-10-4 (B2)

Frame Size : 54 X 65
 Siteline Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.898,
 U-Factor: 1.59, SHGC: 0.56, VLT: 0.66, Energy Rating: 37.00,
 CPD: JEL-N-889-01959-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-11 W43R
Rough Opening: 75 X 85 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size : ~~74 1/4 X 85~~ (74 1/4 x 83 1/4)
 (Outside Casing Size: ~~77 1/4 X 86 13/16~~, (77 1/4 x 85 1/16))
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 2 Wide
 2 High,
 Factory Structural Mull,
 6 9/16 Jamb, 4/4 Thick, ,
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 Mull Window Assembly Has Not Been Tested To AAMA 450.
 Vertical Structural Mull 1 Vertical Spread, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

1 ✓

Line-11-1 (A1)

Frame Size : 54 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-11-2 (A2)

Frame Size : 20 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-12-1 (A1)

Frame Size : 20 X 20
 Siteline Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-12-2 (A2)

Frame Size : 52 X 20
 Siteline Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-12-5 (A3)

Frame Size : 20 X 20
 Siteline Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-12-3 (B1)

Frame Size : 20 X 65
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Height, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-12-4 (B2)


Frame Size : 52 X 65
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.898,
 U-Factor: 1.59, SHGC: 0.56, VLT: 0.66, Energy Rating: 37.00,
 CPD: JEL-N-889-01959-00001, Canadian Energy Star: 123

Line-12-6 (B3)

Frame Size : 20 X 65
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Height, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-13 W45
Rough Opening: 97 1/4 X 85 3/4

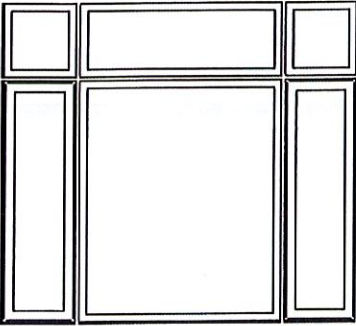

Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size : 96 1/2 X 85 (96 1/2 x 83 1/4)
 (Outside Casing Size: ~~99 1/2 X 86 13/16~~, (99 1/2 x 85 1/16))
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 3 Wide
 2 High,
 Factory Structural Mull,
 6 9/16 Jamb, 4/4 Thick, ,
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 Mull Window Assembly Has Not Been Tested To AAMA 450.
 Vertical Structural Mull 2 Vertical Spreads, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

2 ✓

Line-13-1 (A1)

Frame Size : 20 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-13-2 (A2)

Frame Size : 56 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-13-5 (A3)

Frame Size : 20 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-13-3 (B1)

Frame Size : 20 X 65
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Height, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-13-4 (B2)


Frame Size : 56 X 65
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.898,
 U-Factor: 1.59, SHGC: 0.56, VLT: 0.66, Energy Rating: 37.00,
 CPD: JEL-N-889-01959-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-13-6 (B3)

Frame Size : 20 X 65
 Sitrine Clad Casement, Auralast Pine, DIRECT SET RECTANGLE?
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Height, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-14 W46
 Rough Opening: 79 1/4 X 85 3/4



Viewed from Exterior. Scale: 1/4" = 1'

Main Line Item
 Frame Size : ~~78 1/2 X 85~~ (78 1/2 x 83 1/4)
 (Outside Casing Size: ~~81 1/2 X 86 13/16~~; (81 1/2 x 85 1/16))
 Sitrine Clad Mull Auralast Pine, Casement/Awning Product,
 Brilliant White Exterior,
 Primed Interior,
 Aluminum Brickmould, Standard Sill Nosing, Color Match Metal
 DripCap, Brilliant White Trim,
 3 Wide
 2 High,
 Factory Structural Mull,
 6 9/16 Jamb, 4/4 Thick, ,
 Insulated Low-E 180 Annealed Glass, Protective Film, Silver Spacer,
 Argon Filled, Traditional Glz Bd,
 Mull Window Assembly Has Not Been Tested To AAMA 450.
 Vertical Structural Mull 2 Vertical Spreads, 1/4" Wide,
 PEV 2019.1.2.2446/PDV 6.281 (02/20/19) DF

2 ✓

Line-14-1 (A1)

Frame Size : 20 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-14-2 (A2)

Frame Size : 38 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-14-5 (A3)

Frame Size : 20 X 20
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.7095,
 U-Factor: 1.59, SHGC: 0.59, VLT: 0.68, Energy Rating: 39.00,
 CPD: JEL-N-889-01384-00001, Canadian Energy Star: 123

Line-14-3 (B1)

Frame Size : 20 X 65
 Sitrine Clad Casement, Auralast Pine, DIRECT SET RECTANGLE?
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Height, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	NET UNIT PRICE	QTY	EXTENDED PRICE
----------	-----------------------	--------------------------	-------------------	-----	-------------------

Line-14-4 (B2)

Frame Size : 38 X 65
 Sitrine Clad Geometric, Auralast Pine, Direct Set Rectangle,
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled,
 GlassThick=0.756,
 U-Factor: 1.59, SHGC: 0.58, VLT: 0.67, Energy Rating: 38.00,
 CPD: JEL-N-889-01514-00001, Canadian Energy Star: 123

Line-14-6 (B3)

Frame Size : 20 X 65
 Sitrine Clad Casement, Auralast Pine, **DIRECT SET RECTANGLE?**
 Brilliant White Exterior,
 Primed Interior,
 Nail Fin (Standard),
 3 3/16 Jamb,
 Stationary,
 PG 35,
 Insulated Low-E 180 Annealed Glass, Neat, Protective Film,
 Silver Spacer, Argon Filled, Traditional Glz Bd,
 Custom-Height, GlassThick=0.698,
 U-Factor: 1.59, SHGC: 0.55, VLT: 0.63, Energy Rating: 37.00,
 CPD: JEL-N-878-01569-00001, Canadian Energy Star: 123

Line-15

DELIVER TO SITE

1

Total Units: 39

MERIDIAN COMMUNITY BUILDING REBUILD
Original Window W42 with Trim



Original Window W44

